Hoefer SE 400 Vertical Air-Cooled Electrophoresis System - 18 x 16 cm




- **Compact and economical**
- **Plate 18 x 16 cm**
- **Manufactured from easy-to-assemble moulded materials**
- **For the migration of 2 gels by adding 1 divider plate**
- **Internal seals**
- **Plates, clamps, spacers, combs interchangeable with SE 600 series**

Supplied with :
- Lower chamber, gel maker with high voltage leads
- Upper chamber
- Safety cover with electrodes
- 2 glass plates 18 x 16 cm
- 2 x 16 cm clamps
- 2 cams
- Slotted seals for upper chamber
- Spirit level
- Laminated seals
- Plate separation tool
- Gel seal
- 15-Well comb, 1.5 mm thick (not included with Cat. No.. 151031)
- 2 spacers, 1.5 mm thick, 2 cm width (not included with Cat. No.. 151031)

Cat. No.	Description	€ Excl. VAT
151030	Complete Vertical Electrophoresis System SE 400	**NC -**
151031	Standard Vertical Electrophoresis System SE 400 without combs and spacers	**NC -**

Model	SE 400
Glass plate size	18 x 16 cm
Gap	0.75 mm, 1 mm, 1.5 mm
Max. Electrical settings	500 V, 60 mA, 20 W
Maximum temperature	45 °C
Humidity	Above 80 %
Dimensions (L x H x D)	2x 28 x 15 cm
Safety certificate	EN61010-1, UL31010-1, CSA C22.2 1010.1, CE

Hoefer SE 600 Double Cooled Standard Vertical Electrophoresis System - 18 x 16 cm or 18 x 8 cm

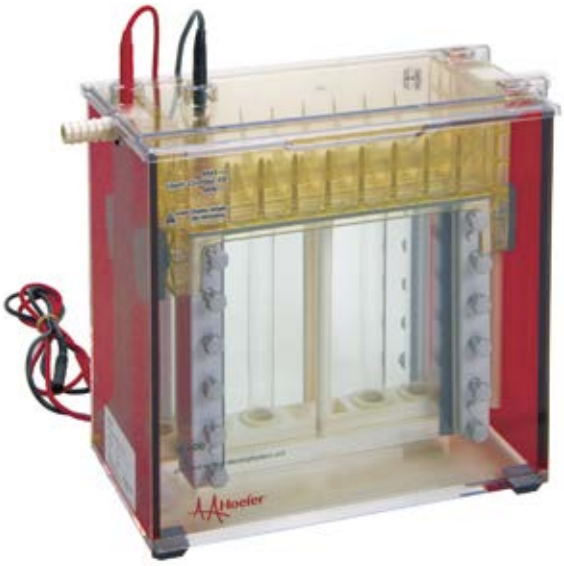

- **For gels 18 x 16 cm**
- **For 4 gels simultaneously with up to 112 samples**
- **For native or denatured polyacrylamide gels and 2D electrophoresis**
- **Migration of gels at uniform temperatures between 1 and 45°C**

Supplied with :
- Lower chamber
- Upper chamber
- Safety cover
- Thermostatting
- 6 glass plates 18 x 16 cm
- 4 x 8 cm clamps
- 6 cams
- 2 Slotted seals for upper chamber
- Gel maker
- Spirit level
- 2 laminated seals
- Plate separation tool
- Gel seal
- 2 x 15-well combs, 1.5 mm thick
- 4 spacers, 1.5 mm thick, 2 cm width

Cat. No.	Description	€ Excl. VAT
151024	SE 600 Complete Standard vertical electrophoresis system	**NC -**

Model	SE 600
Glass plate size	18 x 16 cm or 18 x 8 cm
Gap	0.75 mm, 1 mm, 1.5 mm
Max. Electrical settings	1000 V, 500 mA, 50 W
Maximum temperature	45 °C
Humidity	Above 80 %
Dimensions (L x H x D)	32 x 29 x 14 cm
Safety certificate	EN61010-1, UL61010-1, CSA C22.2 1010.1, CE

TIP

Find the SE400 and SE600 electrophoresis tank casting holders on www.dulis.nl