
POLYPROPYLENE THREADED TUBES

Polypropylene threaded tubes Corning® Gosselin™



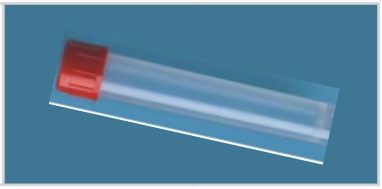

Volume (ml)	5			10		
Diameter (mm)	16.6	16.6	16.6	16	16	16
Height (mm)	54	54	54	97	97	97
Material	Polypropylene; low density polyethylene cap					
Sterile	No	No	Yes	No	Yes	No
Bottom	Flat	Flat	Flat	Rounded	Rounded	Rounded
Caps	Without	Yes	Yes	Yes	Yes	Yes
Autoclavable	Yes					
Max centrifugal speed (g)	3000					
Skirt	No	No	No	Yes	Yes	Yes
Graduation	No	No	No	No	No	No
Marking area	No	No	No	No	No	No
Colour	Translucent					
Operating temperature	-20 °C to +120 °C					
Units/box	4 bags of 500 tubes	4 bags of 400 tubes	4 bags of 400 tubes	4 bags of 250 tubes	4 bags of 250 tubes	4 bags of 250 tubes
Cat. No. tube only	**080938**	**-**	**-**	**-**	**-**	**-**
Cat. No. White cap	**-**	**688118**	**688340**	**080261**	**-**	**-**
Cat. No. red cap	**-**		**688117**	**-**	**030466**	**688339**
€ Excl. VAT/carton	**NC -**	**NC -**	**NC -**	**NC -**	**NC -**	**NC -**

Accessory

Cat. No.	Description	Units/ bag	€ Excl. VAT/ bag
076027	White cap for Cat. No. 080938	1500	**NC -**

Greiner Bio-One Polypropylene threaded tubes



Volume (ml)	12
Diameter (mm)	15.45
Height without cap (mm)	99
Height with cap (mm)	100
Material	Polypropylene; high density polyethylene cap
Sterile	No
Bottom	Rounded
Caps	Yes
Autoclavable	Yes (without cap)
Max centrifugal speed (g)	26000
Skirt	No
Graduation	No
Marking area	No
Colour	Translucent
Operating temperature	- 196 °C to +121 °C
Specifications	Free of DNase and RNase, human DNA and endotoxins; non-cytotoxic
Units/box	900 tubes
Cat. No. White cap	**163270**
€ Excl. VAT/box	**NC -**