HTL™ Labmate™ Pro Pipettors

Single- and Multi-channel pipettors

The HTL Labmate Pro pipettor family contains models with a wide variety of volumes for different laboratory applications. A durable, UV-resistant and autoclavable body is combined with high accuracy and precision performance to ensure many years of reliable service.

- Contoured handle shape and lightweight design
- Proven accuracy and precision
- 5 and 10 mL shafts protected by a filter
- Color-coded for easy volume identification

fully **121°C** autoclavable

UV resistant

years **3** warranty



Easy user calibration



Dual volume setting using the pushbutton or the thumbwheel



Adjustable ejector height system – to accommodate various brands of tips

Available in 8- and 12-channel versions

A suspension system allows the shafts to retract slightly when pressed against a row of pipette tips. Each shaft moves independently, resulting in an even sealing force being applied to all 8 or 12 tips.

The suspension system not only ensures secure tip sealing, but eliminates the common issue of tips becoming jammed. The 360° rotating manifold enables optimal comfort while working.





- Soft spring system for smooth, effortless pipetting

DOMINIQUE DUTSCHER SAS



Plexi 4-position stand (Cat. No. 5480)



Plexi 1-position stand (Cat. No. 5479)



Carousel stand (Cat. No. 5484)



Multiple stand (Cat. No. 5449)


HTL™ Labmate™ Pro Single-channel pipettors

Model	Cat. No.	Color Code	Volume (µL)	A (%)	P (%)	Non-filter Tips
LMP2	5661	🔴	Min. 0.1 1.0 Max. 2.0	±40.0 ± 2.7 ± 1.5	≤12.0 ≤ 1.3 ≤ 0.7	10 µL
LMP10	5662	🔴	Min. 0.5 5.0 Max. 10.0	± 4.0 ± 1.5 ± 1.0	≤ 2.8 ≤ 0.7 ≤ 0.4	
LMP20	5663	🟡	Min. 2 10 Max. 20	± 3.5 ± 1.0 ± 0.8	≤ 1.5 ≤ 0.5 ≤ 0.3	200 µL
LMP50	5667	🟡	Min. 5 25 Max. 50	± 3.5 ± 1.0 ± 0.8	≤ 1.3 ≤ 0.5 ≤ 0.3	
LMP100	5664	🟡	Min. 10 50 Max. 100	± 3.0 ± 1.0 ± 0.8	≤ 1.0 ≤ 0.3 ≤ 0.2	
LMP200	5665	🟡	Min. 20 100 Max. 200	± 2.0 ± 1.0 ± 0.6	≤ 0.7 ≤ 0.3 ≤ 0.2	
LMP250	5660	🟢	Min. 50 125 Max. 250	± 1.0 ± 0.8 ± 0.6	≤ 0.4 ≤ 0.3 ≤ 0.3	300 µL
LMP1000	5666	🔵	Min. 100 500 Max. 1,000	± 2.5 ± 0.8 ± 0.6	≤ 0.6 ≤ 0.3 ≤ 0.2	1,000 µL
LMP5000	5668	○	Min. 500 2,500 Max. 5,000	± 1.2 ± 0.6 ± 0.5	≤ 0.5 ≤ 0.2 ≤0.15	5,000 µL
LMP10000	5669	○	Min. 1,000 5,000 Max. 10,000	± 2.5 ± 0.8 ± 0.5	≤ 0.6 ≤ 0.3 ≤ 0.2	10,000 µL



HTL Labmate Pro Multi-channel pipettors

Model	Cat. No.	Color Code	Volume (µL)	A (%)	P (%)	Non-filter Tips
LMP8-10 LMP12-10	6281 6285	🔴	Min. 0.5 5 Max. 10	± 10 ± 4.0 ± 2.0	≤ 8.0 ≤ 2.0 ≤ 1.2	10 µL
LMP8-50 LMP12-50	6282 6286	🟡	Min. 5 25 Max. 50	± 4.0 ± 3.0 ± 1.6	≤ 2.5 ≤ 1.2 ≤ 0.6	200 µL
LMP8-200 LMP12-200	6283 6287	🟡	Min. 20 100 Max. 200	± 3.0 ± 1.5 ± 1.0	≤ 1.5 ≤ 0.8 ≤ 0.6	
LMP8-300 LMP12-300	6284 6288	🟢	Min. 50 150 Max. 300	± 1.6 ± 1.2 ± 1.0	≤ 1.5 ≤ 1.0 ≤ 0.6	300 µL

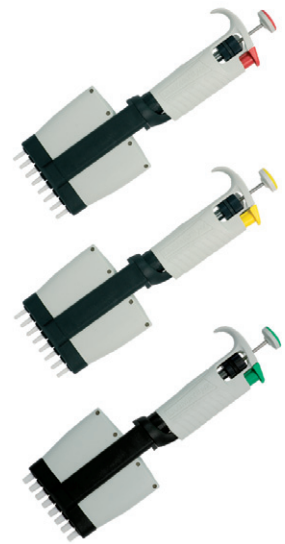

HTL Labmate Pro Starter 4-pack

Model	Cat. No.	Includes
LMP10 LMP20 LMP200 LMP1000	7905	◗ Plexi 4-position stand ◗ Tips (10 µL/96 pcs, 200 µL/96 pcs, 1,000 µL/100 pcs) ◗ Calibration tool (4) ◗ Shelf clip (4) ◗ Instruction manual



DOMINIQUE DUTSCHER SAS