

Kimtech™ Purple Nitrile™ Gloves deliver market-leading protection suitable for challenging life sciences and pharmaceutical manufacturing environments. The high quality nitrile material delivers seamless protection whenever and wherever it is needed.

The synthetic nitrile polymer material is designed for fit and reliability, with textured fingertips for improved grip and excellent water tightness (AQL 0.65) that results in a low risk of pinholes.

The gloves are ambidextrous and incorporate a beaded cuff for added strength and ease of donning, so the wearer can simply grab and go

without any fear of ripping the material.


These nitrile gloves are also anti-static tested to ensure no disruption to samples or equipment and are latex-, silicone- and powder-free.

Kimtech™ Purple Nitrile™ Gloves keep hands comfortable and protected while ensuring that research applications can be carried out contamination-free. The gloves satisfy regulatory compliance requirements and are ideal for use in higher-risk applications as well as being food contact approved.





Kimtech™ Purple Nitrile™ Gloves

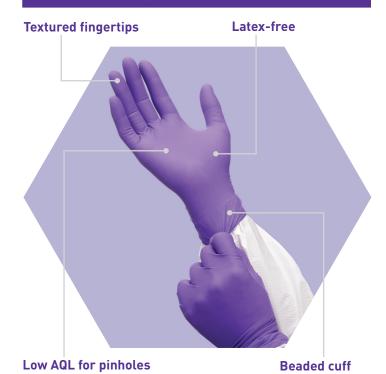

Size Guide

SIZE	CODE	LENGTH	QUANTITY 10x per case
XS	90625	24cm	
S	90626	24cm	100x per box = 1000
М	90627	24cm	
L	90628	25cm	= 1000
XL	90629	25cm	90x per box = 900

Key Features

- Industry-leading gloves offer unrivalled protection, cleanliness and quality
- ➤ Nitrile¹ construction results in products that are stronger and leaner than latex gloves, and feature better protection against a wider range of chemicals, including cytotoxic drugs
- > Gloves are anti-static tested to protect the wearer and equipment, and ambidextrous
- > Textured fingertips enhance grip and tactile sensitivity for safer and more efficient processes
- **>** Beaded cuffs add strength to the gloves, reducing the risk of tearing and increasing their durability, while also reducing roll down for easier donning and doffing
- > Contains no natural rubber latex, silicone or powder, reducing the risks of skin irritation for the wearer

Assured Compliance

- > PPE Cat III according to Regulation (EU) 2016/425 and to the Regulation 2016/425 as brought into the UK law and amended
- > EN ISO 374-1 Type B (JKT) Chemical Splash protection
- **>** EN 374-4 Resistance to degradation by chemicals
- > EN ISO 374-5 Micro Organism and VIRUS protection
- > Food contact approved

Quality Standards

- Manufactured in accordance with ISO 9001 and ISO 13485
- Manufactured in compliance with FDA CFR 21 part 820







Product Specifications

CHARACTERISTIC	VALUE					TEST METHODS			
- Freedom from holes	AQL 0.65 ²					EN 374-2 and ASTM D 5151			
TENSILE PROPERTIES	TENSILE STRENGTH ULTIMATE ELONGATION			NGATION					
- Before aging - After accelerated aging	21 MPa, nominal 21 MPa, nominal		550% nominal 500% nominal			ASTM D 412, ASTM D 573 and ASTM D 3578			
DIMENSION	DIMENSION NOMINAL THICKNESS/WIDTH								
Thickness (mm)	Middle fir	nger	Palm		Cuff		ASTM D 3767, ASTM D 6319		
Timekiness (IIIII)	0.16	0.16 0.14 0.11		0.11	and EN 21420				
Palm width (mm)	X-Small 70	Small 80	Med 9		Large 110	X-Large 120	ASTM D 3767, ASTM D 6319 and EN 21420		

Visit us at www.kimtech.eu or for any questions, email: kimtech.support@kcc.com

¹ Nitrile is a synthetic material exhibiting many of the properties of natural rubber latex while offering other distinct advantages: comfortable fit, resistance to puncturing and abrasion without compromising dexterity or electrostatic dissipative properties. ² AQL as defined per ISO 2859-1 for sampling by attributes.