



From the basic unit to the corrosion-resistant model, the laboratory dedicated syringe line offers precision instruments you can trust. Intended for safe and reliable liquid distribution, the selection of pistol-grip and two-ring instruments comes in a wide volume range. One-year warranty.

The Dosys™ syringes

Product advantages

- Optimal hand balance and ergonomics
- Fast and reliable volume setting
- Excellent reproducibility
- Plunger tightness without O-ring
- High chemical resistance
- Fully autoclavable at 121°C / 250°F




162
163
164

Two-ring handle

172
173
174

Pistol-grip handle



Simple, natural movements ① ②

Both pistol-grip and two-ring handles fit any hand in a comfortable way. Activation performed with limited effort for efficient work even during long dispensing series.

Syringe stand

Stand holds syringe in ready-to-fetch position. Easy-to-clean material. Autoclavable (Cat. No. 320.170).

Volume selection - Reliable reproducibility ③

Volume is set within seconds. It will not vary while activating the syringe, thanks to the safety-locking nut on the micrometric screw. Dose-by-dose reproducibility (CV) is excellent, as witnessed by performance figures.

Plunger tightness without O-ring ④

Smooth plunger travel and tightness achieved through high-precision stainless steel plunger and ground glass barrel. No O-ring to mess with or replace.

Glass protection ⑤

Interchangeable glass barrel is protected by a PVC sleeve (not autoclavable) to prevent breakage.

Few parts assembly - Low maintenance ⑥

The automatic syringes are made of only six main parts, easy to disassemble. Fast access to all elements allows rapid and efficient cleaning. Spares are available at reasonable cost.



Dosys™ laboratory syringes – Unlimited applications



Dose-by-dose distribution



Dispensing distribution



Sterile work



Filtration at your nozzle tip



Aspiration with reverse modulus valve



Animal injection

Instrument descriptions and ordering information

Corrosion resistant

Dosys™ basic syringes 162 / 172

- Fill-by-fill (automatic) through needle or cannula
- Supplied without valve system
- Luer Lock nozzle

Package includes syringe, PVC protection sleeve and operating instructions.



Volume	Division	Dosys 162 Cat. No.	Dosys 172 Cat. No.
0.1 – 1 mL	0.05 mL	162.0501	172.0501
0.3 – 2 mL	0.1 mL	162.0502	172.0502
0.5 – 5 mL	0.5 mL	162.0505	172.0505
1 – 10 mL	1.0 mL		172.0510

Dosys™ classic syringes 163 / 173

- Self-refilling automatic
- Integrated valve system
- Luer Lock nozzle

Package includes syringe, one meter silicone feed tube, sinker, PVC protection sleeve, aspiration and vent cannulas, set of spares for valve, operating instructions.



Volume	Division	Dosys 163 Cat. No.	Dosys 173 Cat. No.
0.025 – 0.3 mL	0.025 mL	163.05003	173.05003
0.1 – 0.5 mL	0.1 mL	163.05005	173.05005
0.1 – 1 mL	0.05 mL	163.0501	173.0501
0.3 – 2 mL	0.1 mL	163.0502	173.0502
0.5 – 5 mL	0.5 mL	163.0505	173.0505
1 – 10 mL	1 mL	163.0510	173.0510
5 – 20 mL	1 mL		173.0520

Dosys™ premium syringes 164 / 174

- Self-refilling automatic
- Detachable valve system
- Enhanced corrosion resistance
- Luer Lock nozzle

Package includes syringe, one meter silicone feed tube, sinker, PVC protection sleeve, aspiration, vent and dosing cannulas, set of spares for valve, operating instructions.



Volume	Division	Dosys 164 Cat. No.	Dosys 174 Cat. No.
0.1 – 1 mL	0.05 mL	164.0501	174.0501
0.3 – 2 mL	0.1 mL	164.0502	174.0502
0.5 – 5 mL	0.5 mL	164.0505	174.0505
1 – 10 mL	1.0 mL	164.0510	174.0510

Performance all models

Volume	Imprecision (CV%)		
	Min. vol.	Mid. vol.	Max. vol.
0.025 – 0.3 mL	< 1.8% ¹⁾	< 1.2%	< 0.5%
0.1 – 0.5 mL	< 1.2%	< 0.9%	< 0.4%
0.1 – 1 mL	< 0.7%	< 0.6%	< 0.4%
0.3 – 2 mL	< 0.6%	< 0.5%	< 0.4%
0.5 – 5 mL	< 0.5%	< 0.4%	< 0.2%
1 – 10 mL	< 0.5%	< 0.4%	< 0.2%
5 – 20 mL	< 0.5%	< 0.4%	< 0.4%

Tests performed with bidest. water, using stainless steel cannula (1.2x50 mm), at constant working speed. ¹⁾ Measured at 0.075 mL

Liquid path materials (for chemical resistance)

Parts	Basic / classic models	Premium models
Feed tubing	Silicone	Silicone
Barrel	Borosilicate glass	Borosilicate glass
Washer, barrel	FPM	FPM
Plunger	Stainless steel DIN 304	Stainless steel DIN 316L
Valve system	Ni-Cr Brass	Stainless steel DIN 316L
Washer, valve	PTFE	PTFE
Spring and balls, valve	Stainless steel, DIN 304	Stainless steel, DIN 304
Sinker, feed cannula	Ni-Cr Brass	Ni-Cr Brass

Accessories for self-refilling syringes



Alternative feed sources ① ②


Optional vial holder conversion set and reagent reservoirs for additional liquid feeding possibilities.

Description	Packaging	Cat. No.
Vial holder conversion set for 163 and 173 models (except 20 mL), without vial	1 / pk	1.187.1C
PP bottle, 60 mL	1 / pk	1.187.060*
PP bottle, 125 mL	1 / pk	1.187.150*
PP bottle, 250 mL	1 / pk	1.187.250*

*Use with Rotlauf inlet valve (Cat. No. 187.613) only, to be ordered separately.

Multiple dispensing manifolds ⑦

For convenient distribution in 24- and 96-well plates. Tight-fitting Luer and Luer Lock syringe nozzles. Stainless steel with PTFE stoppers, autoclavable.

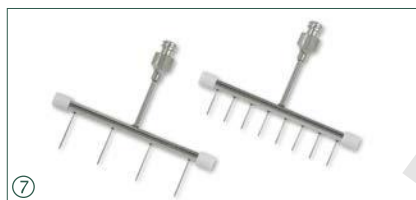

Description	Packaging	Cat. No.
4-channel manifold, 20 mm spacing	1 / pk	1.170.054
8-channel manifold, 9 mm spacing	1 / pk	1.170.058

Dispensing needles & cannulas Luer Lock, stainless steel, autoclavable.

Size (ø x L)	Packaging	Cat. No.
Lab cannulas, blunt end		
0.8 x 40 mm	12 / pk	370.0840
1.2 x 50 mm	1 / pk	370.1250
2.2 x 100 mm	1 / pk	370.22100
2.2 x 150 mm	1 / pk	370.22150
Superior quality needles, bevelled		
1.2 x 10 mm	1 / pk	371.1210UN
1.6 x 20 mm	1 / pk	371.1620UN
2.0 x 30 mm	1 / pk	371.2030UN



Enhanced tightness set ③

The special clear glass barrel / X-ring fitted plunger enhance tightness when demanded by application (ex. filtration, aspiration, etc.).

Description	Packaging	Cat. No.
Set includes one each plunger, X-ring, 5 mL barrel and grease	1 / pk	1.170.205
Spare barrel for tightness set, 5 mL	6 / pk	0187.05T

Anti-Blocking Factor (ABF™) premium anti-corrosive lubricant ④

Reduces instrument wear, provides efficient metal protection

Description	Packaging	Cat. No.
Lubricant spray, 70 mL	1 / pk	1.170.705
	6 / pk	1.170.906
	12 / pk	1.170.912

Injection needles ⑧

Beveled, high-quality needles, stainless steel, autoclavable. 12 / pack.



ø x L, mm	Cat. No.	ø x L, mm	Cat. No.
0.7 x 13	371.0713	1.4 x 20	371.1420
0.8 x 10	371.0810	1.4 x 35	371.1435
0.8 x 25	371.0825	1.5 x 150	371.15150
0.8 x 30	371.0830	1.6 x 20	371.1620
0.8 x 40	371.0840	1.6 x 25	371.1625
1.0 x 10	371.1010	1.6 x 30	371.1630
1.0 x 20	371.1020	1.6 x 100	371.16100
1.0 x 30	371.1030	1.8 x 10	371.1810
1.0 x 40	371.1040	1.8 x 20	371.1820
1.2 x 10	371.1210	1.8 x 30	371.1830
1.2 x 20	371.1220	2.0 x 30	371.2030
1.2 x 35	371.1235	2.0 x 40	371.2040
1.2 x 50	371.1250	2.0 x 50	371.2050

Additional sizes available

Cannula with sprayer nozzle ⑨

Luer Lock, stainless steel, autoclavable.

Size ø x L, mm	Packaging	Cat. No.
3.0 x 180 mm	1 / pk	370.30180
3.0 x 500 mm	1 / pk	370.30500



Aspiration valve ⑤ ⑥

Reverse modus valve set for liquid aspiration (ex. waste collection in separate container). Vented waste collector cap and enhanced tightness set recommended.

Description	Packaging	Cat. No.
Reverse modus aspiration valve unit for 164 / 174 models	1 / pk	1.170.952
Screw cap ø 45 mm, with tubing connection and filtered air outlet	1 / pk	1.170.945

Description	Packaging	Cat. No.
Lubricant spray, refill bottle, 500 mL	1 / pk	1.170.755
	6 / pk	1.170.956
	12 / pk	1.170.962

Cleaning brushes ⑩

Heavy-duty nylon brushes with tufted end and plastic handle for barrel cleaning.



Description	Packaging	Cat. No.
For 0.3, 0.5, 1 mL barrels	6 / pk	1.170.301
For 1, 2, 5 mL barrels	6 / pk	1.170.305
For 5, 10, 20 mL barrels	3 / pk	1.170.320
Set of 6 nylon brushes, 2 each	6 / pk	1.170.300

Drenchers ⑪

For safe animal mouth- and nose-feeding. Stainless steel, autoclavable.

Size (ø x L)	Packaging	Cat. No.
Drenchers, straight		
0.9 x 25 mm	3 / pk	376.0925S
1.2 x 51 mm	3 / pk	376.1251S
1.6 x 102 mm	2 / pk	376.16102S
3.0 x 203 mm	2 / pk	376.30203S
Drenchers, bent		
0.9 x 25 mm	3 / pk	376.0925B
1.2 x 51 mm	3 / pk	376.1251B
1.6 x 102 mm	2 / pk	376.16102B
3.0 x 203 mm	2 / pk	376.30203B

Spare parts for self-refilling syringes



Ground glass barrels ①

Description	Packaging	Cat. No.
Barrel, syringe 0.3 mL	6 / pk	0187.003
Barrel, syringe 0.5 mL	6 / pk	0187.005
Barrel, syringe 1 mL	6 / pk	0187.01
Barrel, syringe 2 mL	6 / pk	0187.02
Barrel, syringe 5 mL	6 / pk	0187.05
Barrel, syringe 10 mL	6 / pk	0187.10
Barrel, syringe 20 mL	3 / pk	0187.20

Spare bags ③

Description	Packaging	Cat. No.
Kit for valve, syringe 0.3 mL	1 bag	1.187.2003
Kit for valve, syringe 0.5 mL	1 bag	1.187.2005
Kit for valve, syringe 1 mL	1 bag	1.187.201
Kit for valve, syringe 2 mL	1 bag	1.187.202
Kit for valve, syringe 5 mL	1 bag	1.187.205
Kit for valve, syringe 10 mL	1 bag	1.187.210
Kit for valve, syringe 20 mL	1 bag	1.187.220

Includes springs, balls, washer for valve and barrel washer.

Vent and feed cannulas ⑤

Description	Packaging	Cat. No.
Short vent cannulas		
Plastic / SS, syringes 0,3 to 5mL	1 / pk	187.933
Chrome plated, syringe 10 mL	1 / pk	187.591
Chrome plated, syringe 20 mL	1 / pk	187.593
Long feed cannulas		
Chrome plated, syringes 0.3 to 10 mL	1 / pk	187.592
Chrome plated, syringe 20 mL	1 / pk	187.594

PVC protection sleeves ②

Description	Packaging	Cat. No.
Sleeve, 0.3, 0.5 mL barrels	6 / pk	1.170.4005
Sleeve, 1 mL barrels	6 / pk	1.170.401
Sleeve, 2 mL barrels	6 / pk	1.170.402
Sleeve, 5 mL barrels	6 / pk	1.170.405
Sleeve, 10 mL barrels	6 / pk	1.170.410
Sleeve, 20 mL barrels	3 / pk	1.170.420

Feed tubing (medical quality silicone) ④

Description	Packaging	Cat. No.
Tube, syringes 0.3 to 10 mL, cut	1 m / pk	187.705
Tube, syringes 0.3 to 10 mL, cut	3x 1 m / pk	187.905
Tube, syringes 0.3 to 10 mL, uncut	10 m / pk	187.910
Tube, syringes 0.3 to 10 mL, cut	by the meter	187.710
Tube, syringe 20 mL, cut	1 m / pk	187.707

Other spare parts

Refer to separate list for exhaustive selection.

The Dosyst™ all-glass syringes

The reusable borosilicate glass syringes offer superior chemical and heat-shock resistance. A precious, low-cost alternative to disposable plastic syringes, complementing the self-refilling models in many applications.

Product advantages

- Precision-machined plunger and barrel
- Excellent fitting and liquid tightness (not gas tight)
- Permanent, high-visibility graduations
- Autoclavable at 121°C / 250°F

Ordering information

Volume	Division	Packaging	Glass Luer nozzle Cat. No.	Metal Luer Lock nozzle Cat. No.
0.1 - 1 mL	0.05 mL	3 / pk	155.0301	155.0501
0.5 - 2 mL	0.1 mL	3 / pk		155.0502
0.2 - 5 mL	0.2 mL	3 / pk	155.0305	155.0505
1 - 10 mL	0.2 mL	3 / pk	155.0310	155.0510
1 - 20 mL	1 mL	2 / pk	155.0320	155.0520
1 - 30 mL	2 mL	2 / pk	155.0330	155.0530
1 - 50 mL	2 mL	1 / pk		155.0550
10 - 100 mL	10 mL	1 / pk	155.03100	155.05100
10 - 150 mL	10 mL	1 / pk		155.05150
10 - 200 mL	10 mL	1 / pk		155.05200
10 - 250 mL	10 mL	1 / pk		155.05250

155

1 to 250 mL





Important information

Refer to package inserts for safety precautions, operating instructions and warranty terms.

User must pay special attention to possible hand fatigue during serial pipetting and its medical consequences such as repetitive strain injuries (RSI).

Mind risks involved in handling hazardous liquids with respect to personal, third party and environmental protection and safety.

Products and specifications are subject to change without prior notice.



SOCOREX ISBA SA
Champ-Colomb 7, P.O. Box 378
1024 Ecublens/Lausanne
Switzerland
socorex@socorex.com
www.socorex.com
Tel. +41 (0)21 651 6000
Fax +41 (0)21 651 6001

Your local distributor

Placeholder for local distributor information, consisting of four L-shaped corner brackets forming a large empty box.

Copyright © 2015 by Socorex Isba SA, Switzerland