

Refill for TOWERPACK boxes





- Uses 60 % less space and 70 % less plastic.
- One reload box for the entire TOWERPACK range.
- Easy-to-use one-handed system.
- Protective base to prevent contamination from environmental pollution and dust.
- Available in standard and sterilized versions.

Loading instructions on the reverse side.



Made in France

Download certificates at www.gilson.com

Gilson S.A.S.


19, avenue des Entrepreneurs BP 145 • F-95400 Villiers-le-Bel, France T +33 (0) 1 34 29 50 00 • F +33 (0) 1 34 29 50 20

www.gilson.com/contactus



Loading a TOWER PACK Box

- 1. Remove the TOWER PACK dispenser from the protective support.
- 2. Place the TOWER PACK on the opened reload box.
- 3. Press down firmly.
- 4. The rack snaps into place.
- 5. When a rack is empty, remove it from the reload box, and load a new rack.

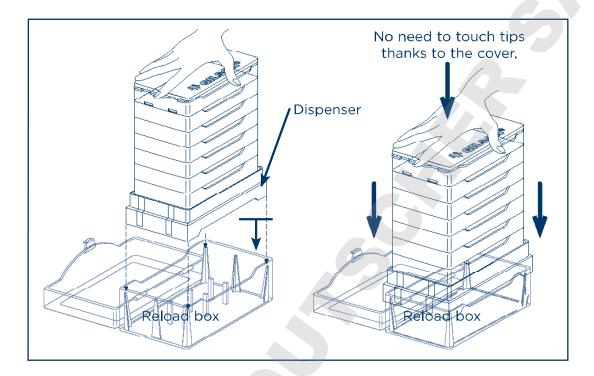

Autoclaving

The entire TOWER PACK can be autoclaved or just the reload box filled with one rack of tips.

Autoclaving conditions: moist heat, 121°C, 0.1 MPa for 20 minutes).



When autoclaving PIPETMAN DIAMOND D10 tips, take care to keep the box upright to prevent these tips from falling out of the rack.

Loading a Multichannel PIPETMAN

The patented Rocky Rack™ makes it extremely easy to fit PIPETMAN DIAMOND tips on a multichannel PIPETMAN.

Exert a light vertical force to obtain a perfect seal on all eight or twelve channels.



