

PRODUCT DATA SHEET

Vacuum Filtration



500mL Vacuum Filtration

Description: 500mL Vacuum Filtration, Sterile

Purpose: Vacuum filters are very useful in large volume samples separation and purification.


Materials

Housing: Lid, Cup, Bottle (GPPS/General Polystyrene);

Cap (HDPE/High-density Polyethylene); Tip (PP/Polypropylene);

Connect (ABS/Acrylonitrile-Butadiene-Styrene)

Dimensions (Unit:mm)

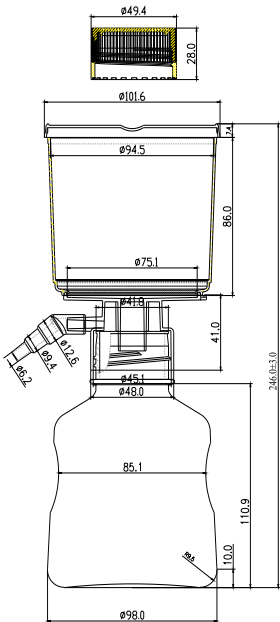

Features

- Available with 6 membrane types of PVDF, PES, MCE, Nylon, CA and PES Express
- Volume: 500mL
- 3 pore sizes: 0.1, 0.22 and 0.45µm
- Light weight and heavy wall construction
- Large knurls on the reservoir bottle cap for easy screw
- Designed wide and easy access bottle mouth for efficiently and stably pour out
- Engraved graduation ensure veracity
- Ergonomically designed sidewalls and collar can simplify tightening/loosening and adjustments
- Designed hose connector can fit multiplicate hose diameters
- Every product is printed with a batch number for traceability
- Autoclavability: No
- Temperature range: -20°C to +50°C
- DNase/RNase free and non-pyrogenic
- Sterilized by irradiation SAL10⁻⁶ (ISO11137)
- Shelf Life: 3 years after month of production
- Manufactured in a Class 100,000 cleanroom environment
- Manufactured under ISO13485 and ISO9001 quality management system



STERILE R

Funnel Capacity	Filter Diameter	Process Volume	Hold-up Volume after purge	Fitting outlet (Thread)	Full Unit Overall Height
500mL	75mm	500mL	≤ 3mL	45mm	245mm

PVDF=Polyvinylidene Fluoride, PES=Polyethersulfone, MCE=Mixed Cellulose Ester

Pore size	0.1 µm	0.22 µm	0.45 µm	0.22 µm	0.45 µm	0.1 µm
Membrane Material	PVDF	PVDF	PVDF	MCE	MCE	PES
Average Bubble Point	80 psi	56 psi	25 psi	51psi	31psi	29psi
Flow Time (at 13 psi)	≤ 2.5 mL/min/cm ²	7.2 mL/min/cm ²	29 mL/min/cm ²	18 µL/min/cm ²	60 µL/min/cm ²	11 mL/min/cm ²

Membrane	Pore Size(µm)	Water flow rate (mL/min/cm ² @0.7bar,10psi)	Water bubble point (psi)
PES	0.22µm	19.3-34.6	53.0-69.0
PES	0.45µm	38.0-100.0	36.0-48.0
NYLON	0.22µm	8.07-14.08	40-60
NYLON	0.45µm	16.0	29.0



Document Number	Revision	Page	Date
VF003	A3	2 of 2	05-26-2021

PRODUCT DATA SHEET

Vacuum Filtration

CA Membrane Performance Characteristics

Pore Size	0.22µm	0.45µm
Minimum Bubble Point psi (kg/cm ²)	50 (3.50)	30 (2.10)
Typical Flow Rate, mL/min/cm ² @ 10psi (0.7 kg/cm ²)	16.1 (1.13)	54.7 (3.85)

Pore size	0.22 µm	0.45 µm
Membrane Material	PES Express	PES Express
Bubble Point	≥ 20 psi	≤ 22.2 psi
Flow Rate	Roll Average ≤ 115 sec/500 mL	≤ 72 seconds

500mL Vacuum Filtration

Cat. No.	Membrane Material	Pore Size(µm)	Capacity(mL)	Membrane Diameter(mm)	Effective Filtration Area(cm ²)	Qty. per bag/case
FPV103500	PVDF	0.1	500	Ø75	38.04	1/12
FPV203500		0.22	500	Ø75	38.04	1/12
FPV403500		0.45	500	Ø75	38.04	1/12
FMC201500	MCE	0.22	500	Ø75	38.04	1/12
FMC401500		0.45	500	Ø75	38.04	1/12
FPE104500	PES	0.1	500	Ø75	38.04	1/12
FPE204500		0.22	500	Ø75	38.04	1/12
FPE404500		0.45	500	Ø75	38.04	1/12
FNY202500	NYLON	0.22	500	Ø75	38.04	1/12
FNY402500		0.45	500	Ø75	38.04	1/12
FCA206500	CA	0.22	500	Ø75	38.04	1/12
FCA406500		0.45	500	Ø75	38.04	1/12
FPE234500	PES Express	0.22	500	Ø75	38.04	1/12
FPE434500		0.45	500	Ø75	38.04	1/12

Drawn	Approved
Date 26 May 2021	Date 26 May 2021
Name Alex Fang	Name James