
Data Sheet

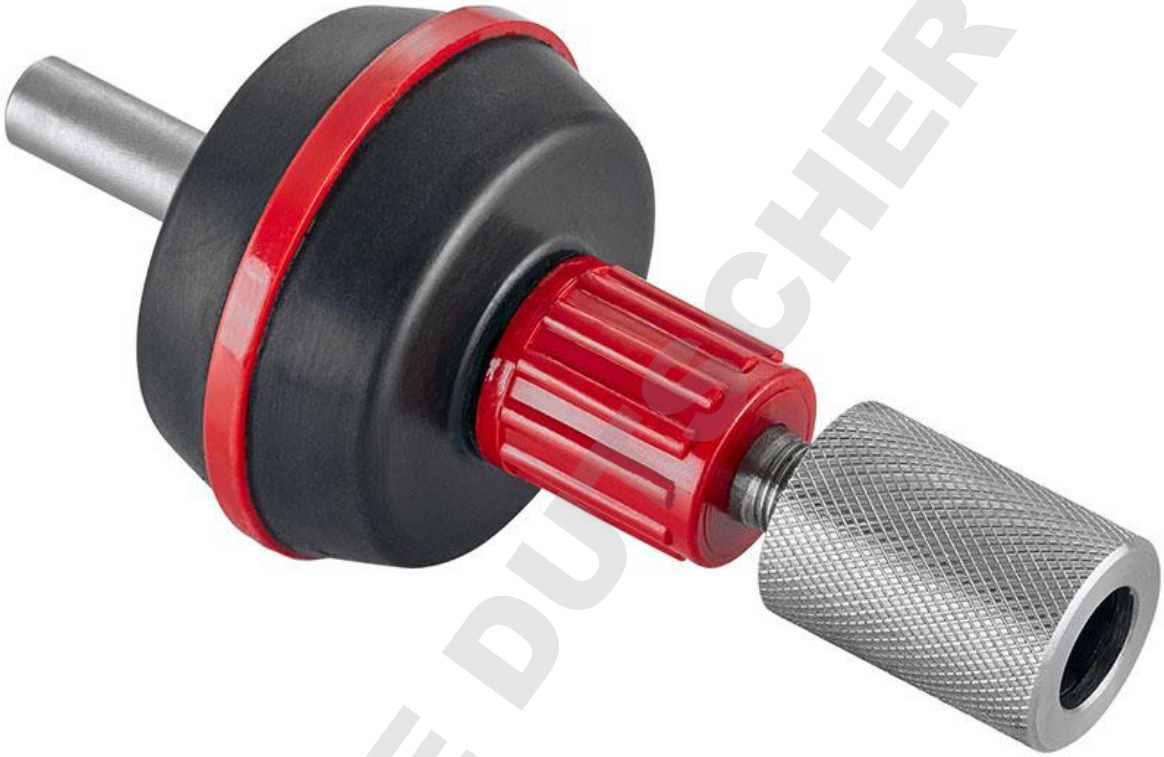

FK 1 Flexible coupling

Required for stirring tasks using glass stirring rods. The flexible coupling compensates for any structural variances.
Clamping range: 6 - 10 mm
Max. torque: 10 Ncm

DOMINIQUE DUTSCHER SAS

© IKA® Werke Staufen/Germany 2017 www.ika.com
Subject to technical changes