tel. (+48) 32 453 91 70
e-mail: info@pol-eko.com.pl
internet: www.pol-eko.com.pl
POL-EKO-APARATURA SP. J.
A. POLOK – KOWALSKA, S. KOWALSKI
44-300 WODZISŁAW ŚLĄSKI, UL. KOKOSZYCKA 172 C

Data sheet

Laboratory Incubator
CLW 750 Smart



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Advantages of the SMART controller:
- 4,3", clear, full colour touch screen
- LAN, USB ports for data transfer
- multi-segment time and temperature programs
- visual and sound alarm
- internal memory for programs and data storage
- event registry
- user manual for direct download
- Quick change of program parameters
- Alarm Bar
- operating with gloves on

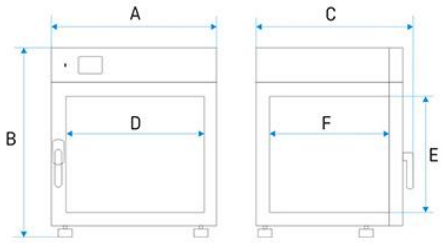


Smart - preview screen

DOCUMENTATION DUTSCHER SAS

TECHNICAL DATA	
air convection	forced
chamber capacity [l]	749
working capacity [l]	749
controller	microprocessor PID
display	4,3" full colour touch screen
TEMPERATURE	
temperature range [°C]	5°C above ambient temperature ... +100°C
temperature resolution every ... [°C]	0,1
temperature fluctuation at 37°C [+/-°C]*	0,1
temperature variation at 37°C [+/-°C]*	0,5
over temperature protection	class 2.0 to DIN 12880 / class 3.1 (option)
CHAMBER	
door	double(5) / door with viewing window (option)
interior	
Smart	acid-proof stainless steel to DIN 1.4301
IG Smart	acid-proof stainless steel to DIN 1.4301
housing	
Smart	powder coated sheet
IG Smart	stainless steel linen finish

overall dims [mm] /1/	
A width	1260
B height	1600
depth C	880
internal dims [mm]	
width D	1040
height E	1200
depth F	600





shelves (standard | max)	5 | 16
- reinforced shelf version (PW) [kg] /3/	100
max unit workload [kg]	140
- reinforced unit version (W) [kg] /4/	300
weight [kg]	260

DOMINIQUE DUTSCHER SAS

ELECTRICAL PARAMETERS	
power supply	230V 50-60Hz
nominal power [W]	1900
warranty	24 months
manufacturer	POL-EKO-APARATURA

all the above technical data refer to standard units (without optional accessories)
* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:
K= +/- (T average max. - T average min.) / 2
** - other power supplies on request
1 - depth doesn't include 50 mm of power cable
2 - on uniformly loaded surface
3 - reinforced shelf
4 - reinforced version
5 - additional internal glass door

OPTIONS AND ACCESSORIES

	Order number: */A	Door with viewing window
	Order number: */P INOX	Stainless steel wire shelf INOX
	Order number: */PP	Perforated shelf
	Order number: */PW	Reinforced shelf
	Order number: KUW GN*/*	Stainless steel cuvettes
	Order number: */W	Reinforced version
	Order number: OWW/OWW LED	Interior lighting
	Order number: GNZ	Internal socket
	Order number: HEPA	HEPA Clean Air Filter
	Order number: OCZ/N	Non-standard access port for external sensor

DOMINIQUE DUTSCHER SAS

LAB DESK	Order numberLabDesk	LabDesk software
>O<	Order number: BRT/*/L or IQ/OQ/PQ	Calibration and IQ, OQ, PQ qualification
DIN 3.1	Order number: */3.1	Over temperature protection 3.1 class according to DIN 12880
	Order number: BPP 12	Battery backup for display
ALARM	Order number: PORT ALARM	Dry alarm contact

DOMINIQUE DUTSCHER SAS