
BR 300 085 **ClassicLine safety eye shower with bowl, wall mounted, exposed pipework**

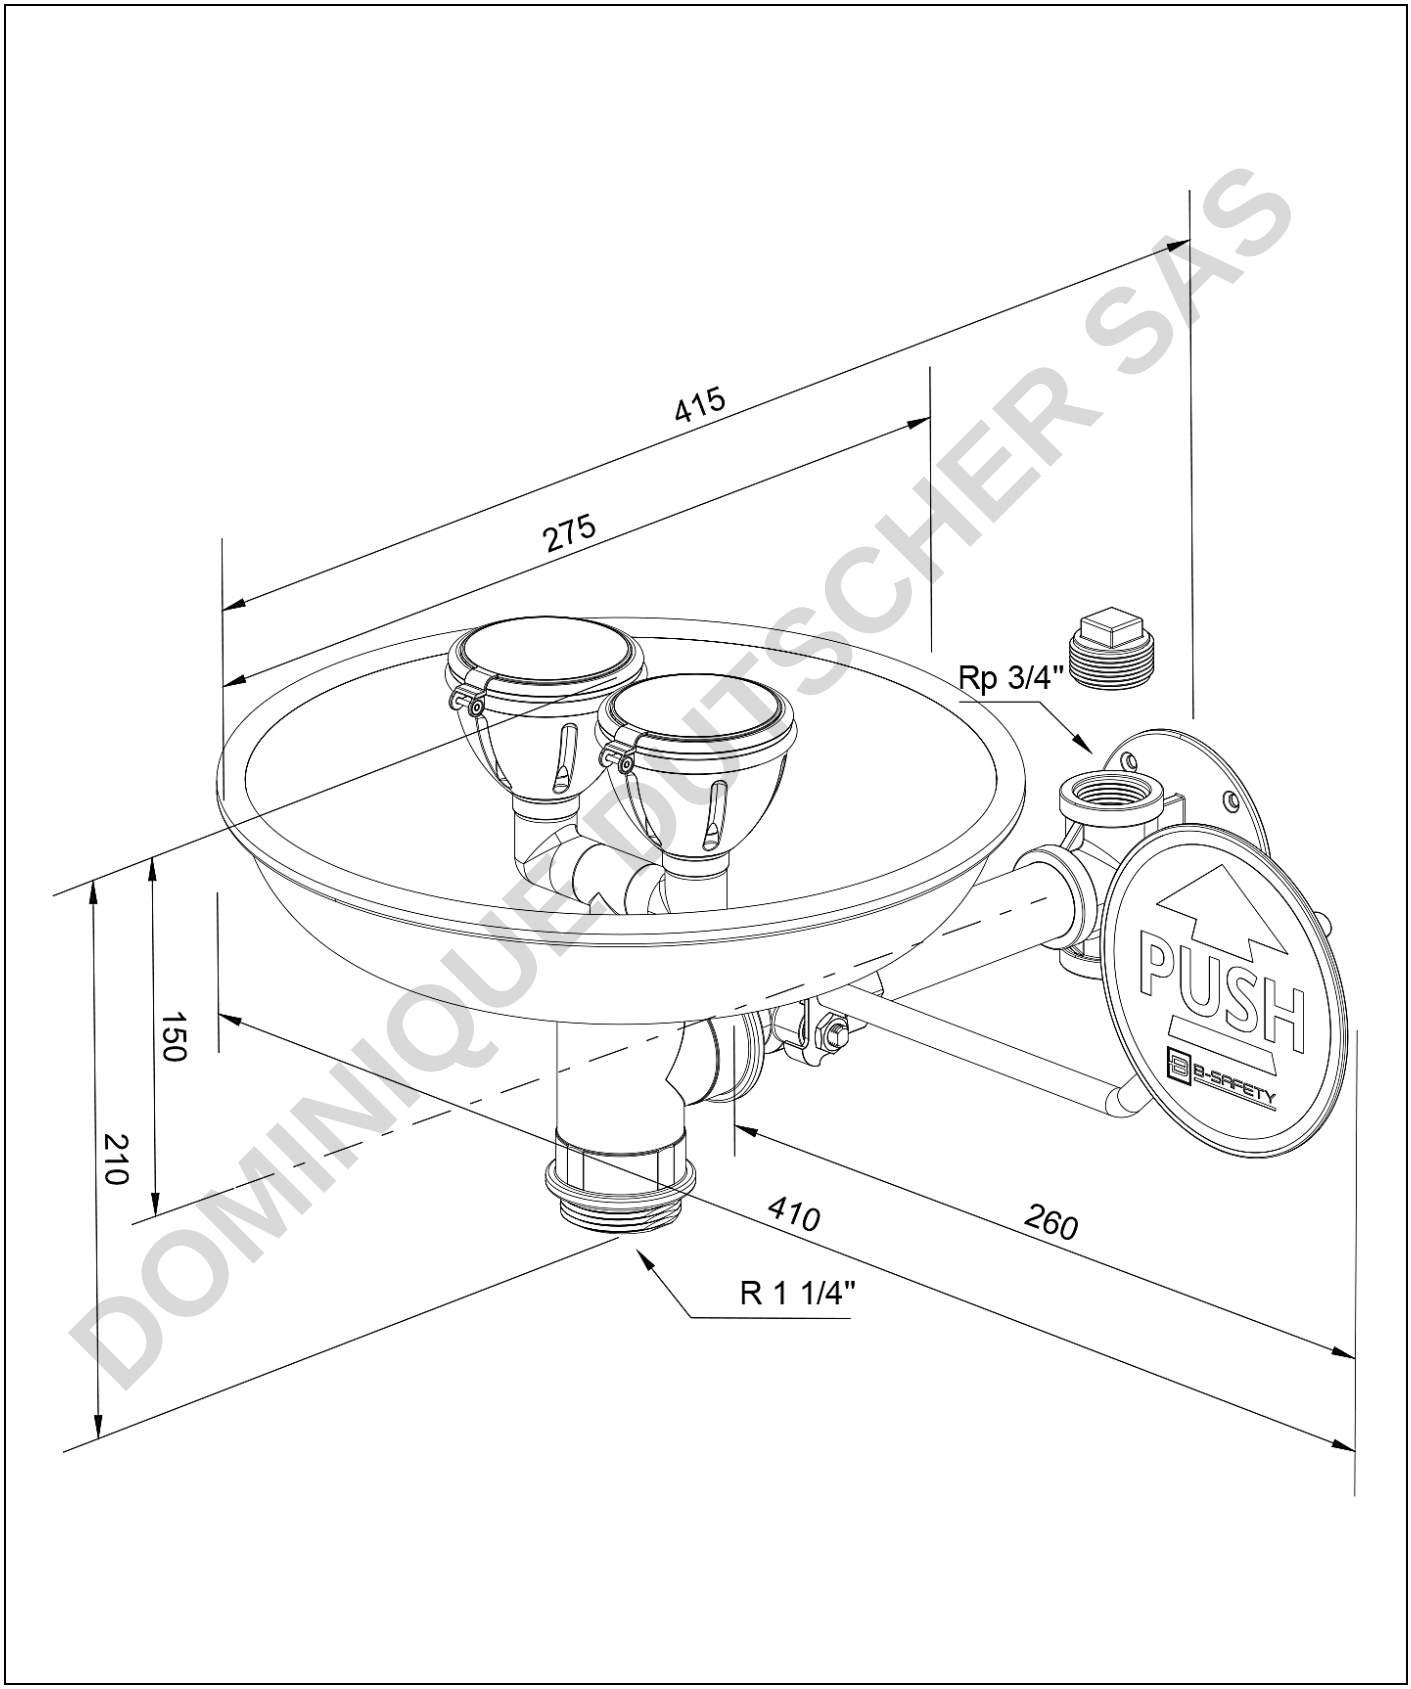

DOMINIQUE DUTSCHER SAS

Technical description

ClassicLine safety eye shower with bowl, wall mounted, exposed pipework
- wall flange 3-fold of stainless steel with 2 connections for integration into a circulation pipe, mounting plate made of stainless steel with 4 mounting holes, chemical-resistant green powder-coated, water inlet ¾" female
- plug 3/4" with stainless steel
- connection pipe of stainless steel for easy installation and alignment of the shower, chemical resistant green powder coated
- ball valve ½" of stainless steel, with PUSH-lever actuation, DIN-DVGW tested and certificated
- push plate made of steel, chemical resistant green powder coated, length 240 mm, with large signal "PUSH", luminescent according to DIN 67510
- integrated flow regulation 14 litre / minute for a standard-compliant jet pattern at a specified working range of 2.5 to 5 bar flow pressure
- high-performance spray heads for large-scale dispersion of water, with plastic spray plate, low calcification, incl. rubber sleeves and sealed dust caps, mounted over distributor fork
- bowl made of plastic, green, diameter 275 mm, water outlet 1 ¼" male
- sign for eye shower according to EN ISO 7010 und ASR A1.3, self-adhesive PVC-film, 100 x 100 mm, viewing distance 10 metre
- height 210 mm, projection 415 mm, total width incl. lever 410 mm
- mounting height 860 mm (± 200 mm)
- according to BGI/GUV-I 850-0, DIN 1988 and EN 1717
- according to ANSI Z358.1-2014 and EN 15154-2:2006
- DIN-DVGW tested and certificated

Manufacturer: B-SAFETY or equal
Article-No.: BR 300 085

Technical specifications

Minimum flow pressure:	2.5 bar
Operating pressure:	2.5 to 5 bar
Flow rate:	14 l/min
Water inlet:	¾" female
Water outlet:	1 ¼" male
Dimensions (H x W x D):	210 x 410 x 415 mm

Compliance with standards	Approvals
- EN 15154-2:2006	- DIN-DVGW, NW-0417CL0263
- ANSI Z358.1-2014	

Material overview	Material	Material description
High-performance shower head:	plastic POM, EPDM	-
U-distributor:	plastic POM	-
Ball valve:	stainless steel	AISI 316
Push plate:	steel	-
Flow regulator:	plastic POM	-
Piping, T-pieces, adapter:	stainless steel	AISI 304
Wall flange, plug:	stainless steel	AISI 316
Bowl:	plastic ABS	-
Sign for eye shower:	PVC-foil	-

DOMINIQUE DUTSCHER SAS

Product overview	
BR 300 085	ClassicLine safety eye shower with stainless steel bowl, wall mounted, exposed pipework

DOMINIQUE DUTSCHER SAS