



Proven technology. More individuality.

Elmasonic Select












Areas of use

Powerful and individual - these are the ultrasonic cleaning devices of the Elmasonic Select series.

Equipped with 37 kHz ultrasonic frequency, 5 ultrasonic modes, the possibility to save up to 4 cleaning programmes, a heating and tank volumes from 3 to 90 litres (from Select 60 with drain), Elmasonic Select devices are versatile.

Application-specific cleaning chemicals and practical accessories such as baskets, noise protection box, holders, etc. ensure the best cleaning results and make cleaning easier.

| | | |
|-------------------------|---|---|
| Developed for | <ul style="list-style-type: none">Research and development laboratoriesPharmaceutical and industrial-analytical laboratoriesWork and repair shopsMetal processing companiesManufacturers of industrial componentsWatchmakersJewellersWatch and jewellery workshops |    |
| Cleans | <ul style="list-style-type: none">Laboratory instruments such as test tubes, glass pipettes and burettesIndustrial components and parts such as carburettors, filtersWatch components such as hinges, clasps, housingsJewellery such as earrings, bracelets - with and without gem stones |    |
| Removes | <ul style="list-style-type: none">ResinsOil and greaseAdhesive residuesGrinding and polishing pastesChipsFlux agentsOrganic contamination such as horn and skin residuesWear dirt | |
| Prepares samples | <ul style="list-style-type: none">DegassingDispersingEmulsifyingHomogenisingDeagglomeratingThermosensitive incubationsLysesBiochemical assays |    |



Individual



Adjustable cleaning programmes

Memory for 4 individual cleaning programmes

- Cleaning process in the ultrasonic cleaning device can be called up for reproducible results
- Fast switching between favourite programmes



To configure

The auto-degas mode removes disturbing air bubbles in the cleaning liquid and thus leads to better cleaning results. For temperature-sensitive parts or temperature-sensitive processes, the limit temperature can be set individually and the display changed to °C / °F.

Strong



5 ultrasonic modes for best cleaning results and easy sample preparation

dynamic: Combines the ultrasonic modes pulse and sweep to increase the overall cleaning performance

pulse: Removes even stubborn contaminations through a pulsating sound field distribution

sweep: Uniform distribution of the ultrasonic power for most cleaning tasks

eco: For gentle cleaning with quiet operation and for a longer service life of the ultrasonic cleaning device

degas: Quick degassing of freshly prepared cleaning solutions and (HPLC) samples

Intuitive



Clear and simple

Clear, easy-to-read display showing all relevant parameters e.g. remaining cleaning time, set/actual temperature for precise adjustment.



With feedback

The user is always informed about the operating status of the device via clear symbols for e.g. end of cleaning or overtemperature as well as acoustic and visual feedback.

Application oriented




With matching accessories

Plastic lids ensure quieter operation and serve as drip trays for baskets and parts. Further accessories such as holders, inserts or noise protection boxes facilitate the work for the most diverse cleaning tasks.



Through industry-specific cleaning chemistry

The industry-specific cleaning chemistry is ecologically and economically optimised. Overviews for the selection of suitable cleaners with application and dosing aids are available.

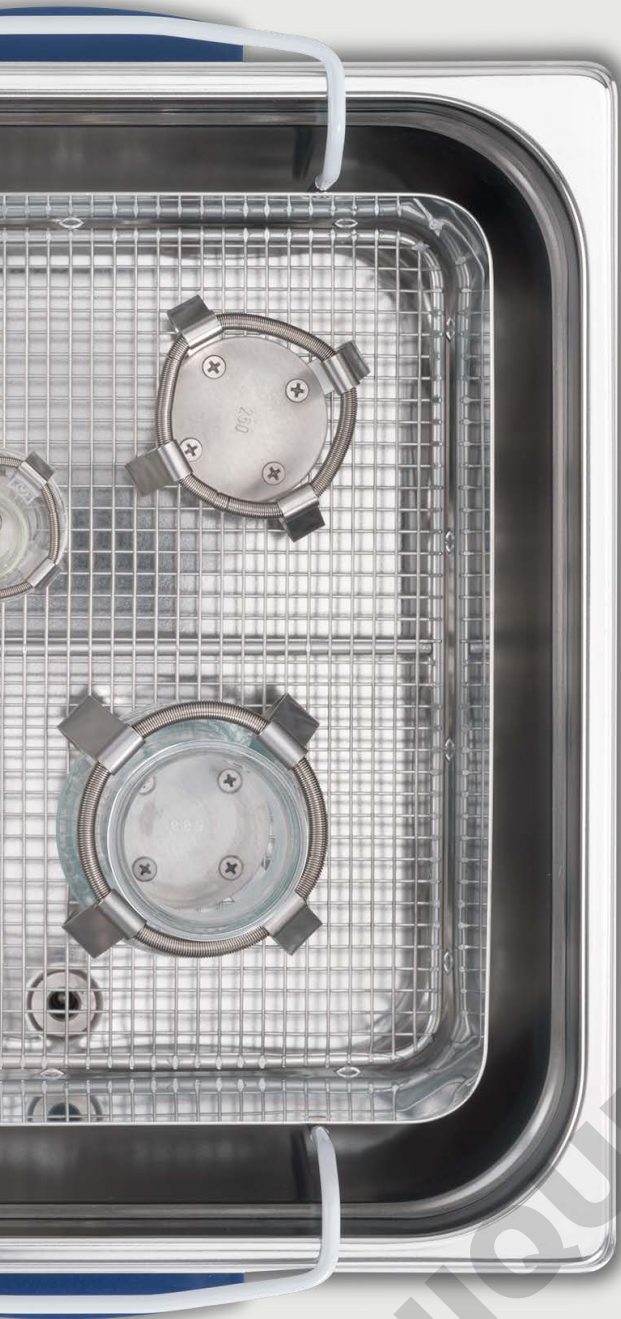

DOMINIQUE DUTSCHER SAS

Elma Schmidbauer GmbH
Gottlieb-Daimler-Str. 17
78224 Singen (Germany)
www.elma-ultrasonic.com

Subject to technical and optical changes.
Elmasonic Select_EN_03_21