Ice Flakes

GB 601 HC

Self-contained ice maker - Granular system
Daily production up to **73 kg**

Hotel	●●●●●○○○
Ristoranti	●●●○○○○○
Fast food	●○○○○○○○
Bar	●○○○○○○○
Discoteche	●●●○○○○○
Mercati ittici	●●●●●●○○
Supermercati	●●●●●●●●
Medicale & SPA	●●●●●●●●
Industrie	●●●●●●○○



DOMINIQUE DEUTSCHER SAS

▶ Features & Plus

- Granular ice - 80-82% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Removable and cleanable air filter
- AISI 304 SS evaporator
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- Standard and special voltages
- HFC Free



AISI 304 SS Scotch Brite finish


Removable and cleanable air filter


AISI 304 SS evaporator


Dust-proof water basin


Disappearing insulated door

2 Years Warranty subject to limitations

▶ Certifications available for this model

BREMA


www.bremaice.it
info@bremaicegroup.it

We are Brema Group

Ice Flakes

GB 601 HC

Self-contained ice maker - Granular system
Daily production up to 73 kg

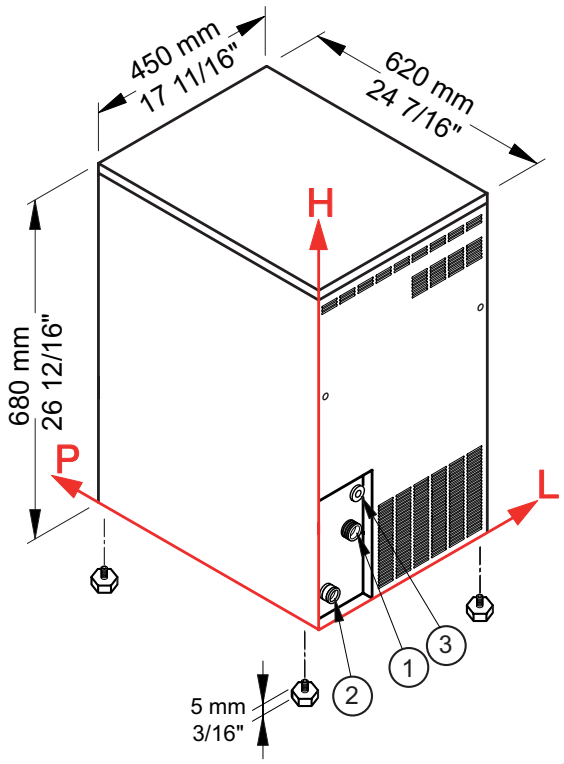

▶ Working conditions

• Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

▶ Performance

Air temperature \ Water temperature	7° C	45° F	15° C	60° F	21° C	70° F
10° C	73 kg					
50° F		161 lbs				
21° C			67 kg			
70° F				148 lbs		
32° C					53 kg	
90° F						117 lbs

▶ Connections

① Water inlet:106 mm / 4 3/16" - 135 mm / 5 5/16" - 3/4"
②Water outlet:55 mm / 2 3/16" - 55 mm / 2 3/16" - 24 mm / 15/16"
③Electrical connection:114 mm / 4 8/16" - 218 mm / 8 9/16"

All measures are referred to the rear bottom-left corner (L-H-Ø)

▶ Technical information

Production in 24h	67 kg / 148 lbs
Store capacity, up to	9 kg / 20 lbs
Cooling system	A - W
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	400 W
Fuse	10 A
Electrical consumption	16 kWh/100kg

Water consumption	A: 1,0 l/kg - 12,0 gal/100 lbs
	W: 5,0 l/kg - 59,9 gal/100 lbs
Sizes (L-P-H mm)	450 - 620 - 680
(L-P-H in)	17 11/16 - 24 7/16 - 26 12/16
Sizes with pack (L-P-H mm)	505 - 675 - 850
(L-P-H in)	19 14/16 - 26 9/16 - 33 7/16
Net weight	56 kg / 123 lbs
Gross weight	64 kg / 141 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:
Sizes without feet
Ambient temperature +21° C
Water temperature +15° C
Electrical consumption at +32° C (standard voltage)
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 00 - Issued may 2026

DOMINIQUE DUTSCHER SAS