

Geno™ II T

For all sensitive laboratory applications



Deionised Water


- Type 2 (DI) water
- Space-saving footprint with integrated 35L reservoir
- Make-up rate 10 or 20L/hr with fast dispense
- Intuitive, icon-based, interactive user interface with touch screen
- Wall or bench mounting
- Quiet, internal boost pump and patented anti-vibration mountings
- Energy consumption of <60w when processing water

MODEL	MAKE-UP FLOW RATE (@15°C/59°F)	WATER QUALITY (@25°C/77°F)	TOC REDUCTION***	INORGANICS REJECTION RATE**	DAILY USAGE (MAX)*	FEED WATER PRESSURE
GENO II T 10	10L/hr	1 - 15MΩ·cm	96%	≥98%	80L/day	0.1 - 6 bar 1.45 - 87 psi
GENO II T 20	20L/hr	1 - 15MΩ·cm	96%	≥98%	160L/day	0.1 - 6 bar 1.45 - 87 psi

* Based on make-up rate of 8hr/day excluding DI resin capacity

** On UV model and depending on feed water impurities

*** Depending on feed water quality

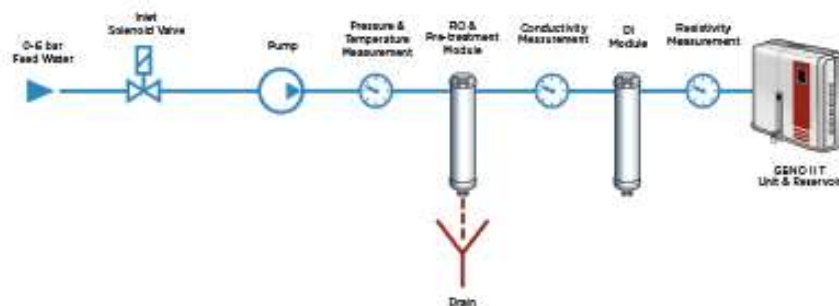

Want to view the system Specifications?



SCAN ME

