eppendorf

Register your instrument!
www.eppendorf.com/myeppendorf

HeatSealer S200

Operating manual

DOMINIQUE DUTSCHER SAS

Copyright© 2016 Eppendorf AG, Germany. All rights reserved, including graphics and images. No part of this publication may be reproduced without the prior permission of the copyright owner.

Eppendorf® and the Eppendorf logo are registered trademarks of Eppendorf AG, Germany.

Registered trademarks and protected trademarks are not marked in all cases with ® or ™ in this manual.

DOMINIQUE DUTSCHER SAS

5392 900.006-02/082016

Table of contents

1 Operating instructions 5
1.1 Using this manual 5
1.2 Danger symbols and danger levels 5
1.2.1 Danger symbols 5
1.2.2 Danger levels 5
1.3 Symbols used 6

2 Safety 7
2.1 Intended use 7
2.2 Warnings for intended use 7
2.3 Warning signs on the device 8
2.4 User profile 8
2.5 Information on product liability 8

3 Product description 9
3.1 Delivery package 9
3.2 Features 9
3.3 Product overview 10

4 Installation 11
4.1 Preparing installation 11
4.2 Selecting the location 11
4.3 Changing the voltage 11
4.4 Connecting the device 13

5 Operation 14
5.1 Operating controls 14
5.2 Parameter settings 15
5.2.1 Setting the temperature 15
5.2.2 Setting the sealing duration 15
5.3 Sealing the plate 16
5.4 Switching the audible alert on/off 20

6 Troubleshooting 21
6.1 Thermal fuse triggered 21
6.2 The device cannot be switched on or does not heat up 21

7 Maintenance 22
7.1 Cleaning 22
7.2 Disinfection/Decontamination 23
7.3 Replacing fuses 24

DOWNLOAD DUTSCHER SAS

8 Technical data 25

9 Transport, storage and disposal 26
9.1 Decontamination before shipment 26
9.2 Transport 26
9.3 Storage 26
9.4 Disposal 27

10 Ordering information 28

Certificates 29

DOMINIQUE DUTSCHER SAS

1 Operating instructions

1.1 Using this manual

- Read this operating manual completely before using the device for the first time. Also observe the instructions for use of the accessories.
- This operating manual is part of the product. Thus, it must always be easily accessible.
- Enclose this operating manual when transferring the device to third parties.
- You will find the current version of the operating manual for all available languages on our webpage under www.eppendorf.com.

1.2 Danger symbols and danger levels

The safety instructions in this manual appear with the following danger symbols and danger levels:

1.2.1 Danger symbols

Hazard point	**Hot surface**
Electric shock	**Biohazard**
Material damage	

1.2.2 Danger levels

DANGER	*Will* lead to severe injuries or death.
WARNING	*May* lead to severe injuries or death.
CAUTION	May lead to light to moderate injuries.
NOTICE	May lead to material damage.

DOMINIQUE DUTSCHER SAS

1.3 Symbols used

Depiction	Meaning
1. 2.	Actions in the specified order
▸	Actions without a specified order
•	List
Text	Display text or software text
ⓘ	Additional information

DOMINIQUE DUTSCHER SAS

2 Safety

2.1 Intended use

The Eppendorf HeatSealer S200 is used to seal plates using suitable films and foils.

The Eppendorf HeatSealer S200 can be used in training/routine/research labs in the life sciences, industry and chemistry sectors. The device may only be used for research purposes. Eppendorf does not provide a warranty for other applications. Not suitable for use in diagnostics or therapeutics.

2.2 Warnings for intended use

WARNING! Damage to health due to infectious liquids and pathogenic germs.

- When handling infectious liquids and pathogenic germs, observe the national regulations, the biological security level of your laboratory, the material safety data sheets, and the manufacturer's application notes.
- Wear personal protective equipment.
- For comprehensive regulations about handling germs or biological material of risk group II or higher, please refer to the "Laboratory Biosafety Manual" (source: World Health Organization, Laboratory Biosafety Manual, in its respectively current valid version).

CAUTION! Poor safety due to incorrect accessories and spare parts.
The use of accessories and spare parts other than those recommended by Eppendorf may impair the safety, functioning and precision of the device. Eppendorf cannot be held liable or accept any liability for damage resulting from the use of incorrect or non-recommended accessories and spare parts, or from the improper use of such equipment.

- Only use accessories and original spare parts recommended by Eppendorf.

NOTICE! Spilled liquid can cause damage to the device.

- Switch the device off.
- Unplug the mains/power plug.
- Collect the spilled liquid. Observe the specifications for the liquid in the material safety data sheets.

DOMINIQUE DUTSCHER SAS

2.3 Warning signs on the device

Warning sign	Meaning
	CAUTION! Burns from hot surfaces. The metal surfaces of the heating plate reach temperatures of up to 200 °C. ▶ Do not touch the hot surfaces. ▶ Let the device cool down to ambient temperature before starting an inspection or repair work.
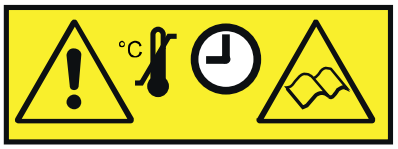	How to set the temperature range and sealing duration is described in the operating manual. ▶ Read the operating manual.
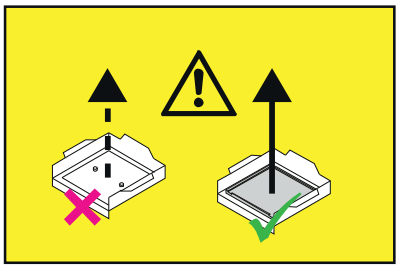	Only use the device with the plate adapter inserted.

2.4 User profile

This device may only be operated by trained and skilled personnel.

Before using the device, read the operating manual carefully and familiarize yourself with the device's mode of operation.

2.5 Information on product liability

In the following cases, the designated protection of the device may be compromised. Liability for any resulting property damage or personal injury is then transferred to the operator:

- The device is not used in accordance with the operating manual.
- The device is used outside of its intended use.
- The device is used with accessories or consumables which are not recommended by Eppendorf.
- The device is maintained or repaired by people not authorized by Eppendorf.
- The user makes unauthorized changes to the device.

DOMINIQUE DUTSCHER SAS

3 Product description

3.1 Delivery package

Quantity	Description
1	HeatSealer S200
1	Mains/power cord
1	Adapter for 96-well PCR plates
1	Fuse for 115 V
1	Operating manual

3.2 Features

The Heatsealer enables reliable and quick sealing of a multitude of plates.

The sealing duration and temperature can be set on the Heatsealer. The display shows a countdown during the sealing process.

Sealed plates protect samples against evaporation and are thus highly suitable for transporting or storing samples.

The HeatSealer S200 excels with the following features:

- Seals 96- and 384-well plates.
- Suitable for PCR and DWP plates and microplates.
- Suitable for plates of different heights and materials.
- Optimum sealing of plates using suitable films and foils through adjustable sealing temperature.
- Reproducible sealing results through adjustable sealing duration.
- An integrated thermostat prevents the device from overheating.

DOMINIQUE DUTSCHER SAS

3.3 Product overview

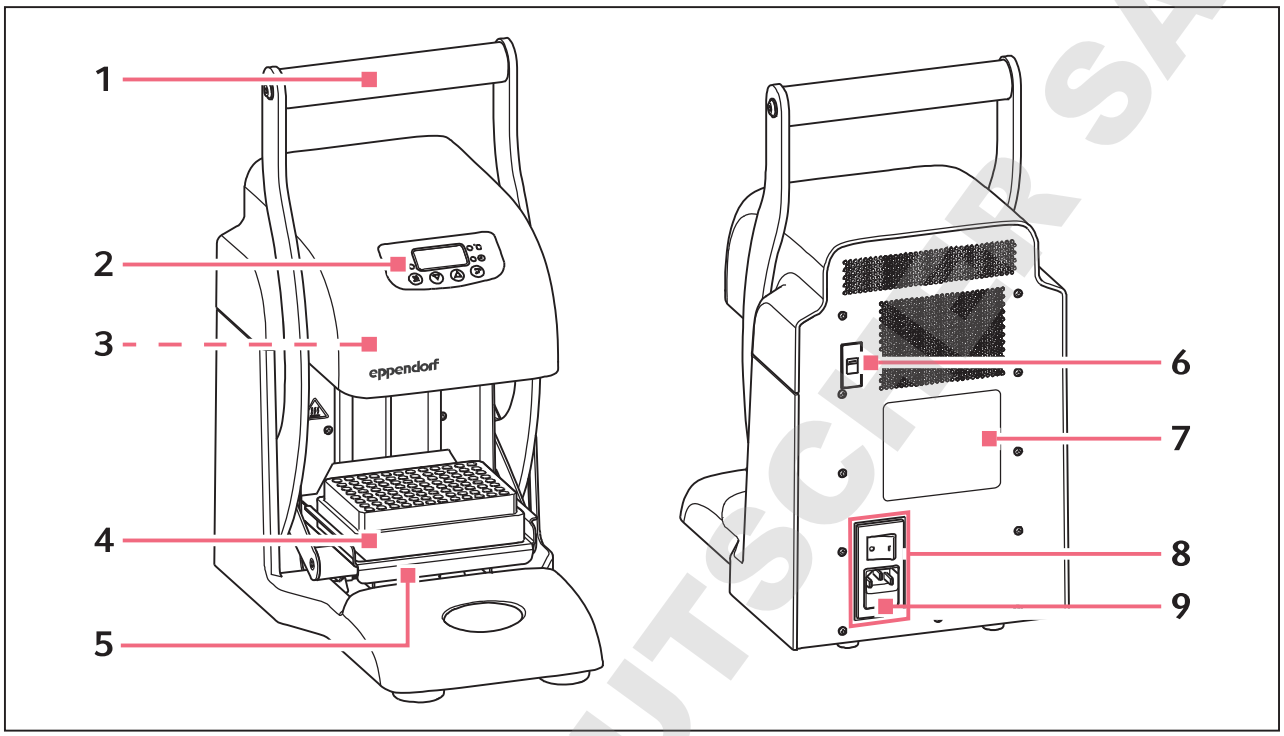

1 Handle
2 Control panel
3 Heating plate
4 Plate adapter
5 Adapter holder
6 Selector switch for mains/power supply voltage
7 Name plate
8 Mains/power cord socket with mains/ power switch
9 Fuse drawer

DOMINIQUE DUTSCHER SAS

4 Installation

4.1 Preparing installation

Store the transport packaging and packing material for future safe transport or storage.

- Use the details included in the delivery package to check that the delivery is complete .
- Check all parts for any transport damage.

4.2 Selecting the location

Select the device location according to the following criteria:

- Mains/power connection in accordance with the name plate
- Minimum distance to other devices and walls: 10 cm
- Resonance free table with horizontal even work surface
- The design of table is suitable for operating the device.
- Surrounding area must be well ventilated.
- The location must be protected against direct sunlight.

The mains/power switch and cutting unit of the mains/power line must be easily accessible during operation (e.g, residual current circuit breaker).

4.3 Changing the voltage

DANGER! Electric shock.

- Switch off the device and disconnect the power plug before starting maintenance or cleaning work.

NOTICE! Damage to device due to a fuse that does not match the preselected mains/power supply voltage.

- Use a fuse that matches the preselected mains/power supply voltage in accordance with the table.

The device is supplied with a fuse for 230 V.
If the device is to be converted for a mains/power supply voltage of 115 V, then the fuse must be replaced according to the table.

DOMINIQUE DUTSCHER SAS

Setting the mains/power supply voltage on the device	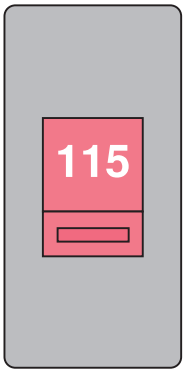	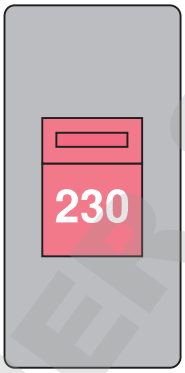
Voltage supply	110 - 120 V ±10 %	220 - 230 V ±10 %
Fuse	T3.15 AH 250 V 20x5 mm	T1.6 AH 250 V 20x5 mm

The selector switch for the mains/power supply voltage is located on the rear side of the device.

The mains/power cord socket with the mains/power switch is only sealed by a security sticker during delivery.

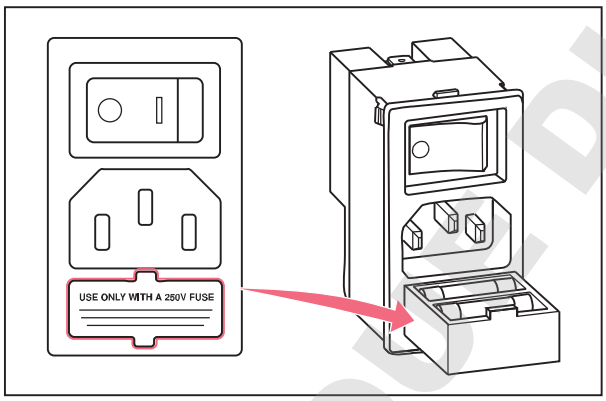

1. Remove the security sticker.
2. Set the mains/power supply voltage at the selector switch.
3. Open the fuse drawer using a suitable screwdriver and pull it right out.
4. Remove the fuse and the spare fuse, if there is one, from the fuse drawer.
5. Insert a fuse for the selected mains/ power supply voltage in the rear compartment.
6. Close the fuse drawer again.

DOMINIQUE DUTSCHER SAS

4.4 Connecting the device

WARNING! Risk from incorrect supply voltage

- Only connect the device to voltage sources which correspond to the electrical requirements on the name plate.
- Only use sockets with a protective earth (PE) conductor and suitable power cable.

WARNING! Electric shock due to damage to device or mains cable.

- Only switch on the device if the device and mains cable are undamaged.
- Only use devices that have been properly installed or repaired.
- In case of danger, disconnect the device from the mains supply by pulling the power plug from the device or the mains socket or, by using the isolating device intended for this purpose (e.g., emergency stop switch in the laboratory).

NOTICE! Damage to electronic components due to condensation.
Condensate can form in the device after it has been moved from a cool environment to a warmer environment.

- After installing the device, wait at least for 12 h. Only then connect the device to the mains.

Prerequisites

- Device is switched off.
- Electrical connection data in accordance with name plate.
- Voltage is switched on.
- Fuse matches selected voltage.

- Connect the mains/power cable included in the delivery.

DOMINIQUE DUTSCHER SAS

5 Operation
5.1 Operating controls

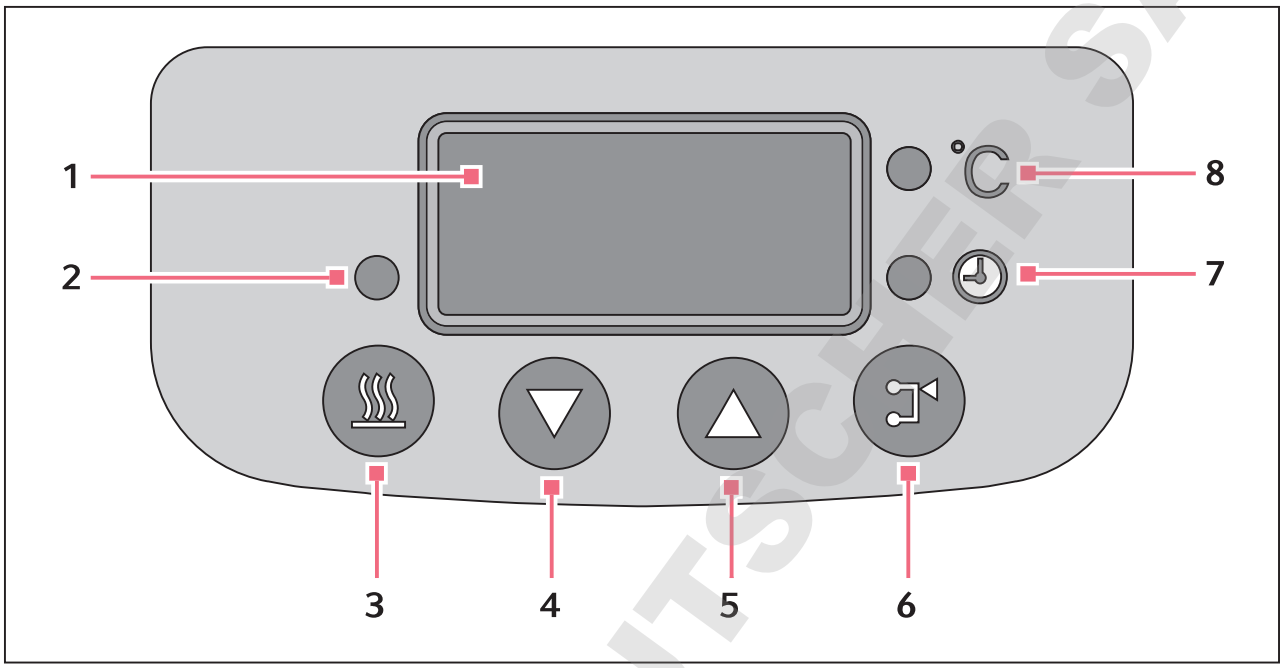

1 **Display**
2 ***heater* status LED**
3 ***heater* key**
4 ***down* key**
5 ***up* key**
6 ***mode* key**
7 ***time* LED**
8 ***temperature* LED**

	The heating plate is switched on/off by means of the *heater* key. • *heater* status LED does not illuminate Heating is off. • *heater* status LED flashes Heating plate heats up. • *heater* status LED illuminates Set temperature has been reached.
	Display value is gradually reduced.
	Display value is gradually increased.

DOMINIQUE DUTSCHER SAS

	The *mode* key is used to switch between two modes: • Setting the temperature • Setting the sealing duration
	temperature LED illuminates *temperature* mode is selected. The temperature can be set.
	time LED illuminates *time* mode is selected. The sealing duration can be set.

5.2 Parameter settings

The sealing duration depends on the selected combination of plate and foil. A sealing duration that is too long can damage the plate, destroy samples and reduce the sealing quality. Before sealing plates with samples, determine the optimum sealing temperature and time with an empty plate. Start with 2 s to 3 s.

5.2.1 Setting the temperature

1. Switch on the device.
2. Press the *mode* key until the *temperature* LED illuminates.
3. Use the *up* and *down* keys to set the desired temperature.
   The temperature can be set from 125 °C to 200 °C in 1 °C increments.

5.2.2 Setting the sealing duration

1. Press the *mode* key until the *time* LED illuminates.
2. Use the *up* and *down* keys to set the desired sealing duration.
   The sealing duration can be set from 1.0 s to 9.0 s in 0.5 s increments.

DOMINIQUE DUTSCHER SAS

5.3 Sealing the plate

CAUTION! Crush hazard due to moving assemblies.
Risk of crushing your fingers or hands in case of improper operation.

- Do not place your fingers between the moving device components when sealing the plate.
- Do not keep hold of the foil during the sealing process.

CAUTION! Burns from hot surfaces.
The metal surfaces of the heating plate reach temperatures of up to 200 °C.

- Do not touch the hot surfaces.
- Let the device cool down to ambient temperature before starting an inspection or repair work.

NOTICE! Damage to device due to unsuitable consumables.
The metal surfaces of the heating plate reach temperatures of up to 200 °C. Consumables with a low temperature resistance can burn or melt.

- Only use consumables with a temperature resistance suitable for the sealing temperature.
- Do not exceed the optimum sealing duration.

DOMINIQUE DUTSCHER SAS

The optimum height for sealing is set by means of the adapter.

- Make sure that adapter and plate match.

DOMINIQUE DUTSCHER SAS

Adapter	Matching plates
Plate Adapter, high profile (not included in the HeatSealer delivery package) 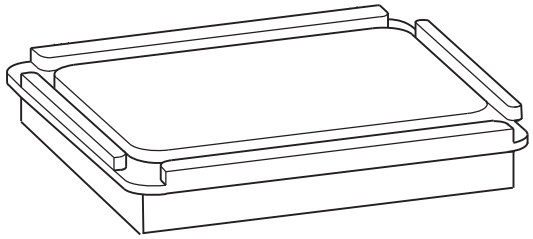	96-well Microplates 384-well Microplates 384-well PCR Plates Deepwell Plate 384/200µL Deepwell Plate 96/500µL
96-well PCR Plate Adapter 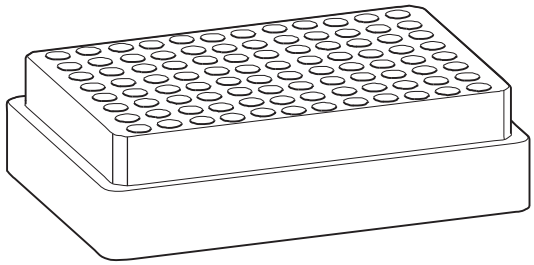	96-well PCR Plates unskirted 96-well PCR Plates semi-skirted 96-well PCR Plates skirted
Plate Adapter, low profile (not included in the HeatSealer delivery package) 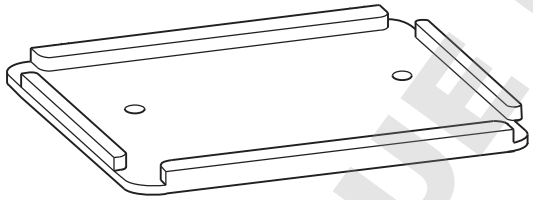	Deepwell Plate 96/1000µL Deepwell Plate 96/2000µL

DOMINIQUE DUTSCHER SAS

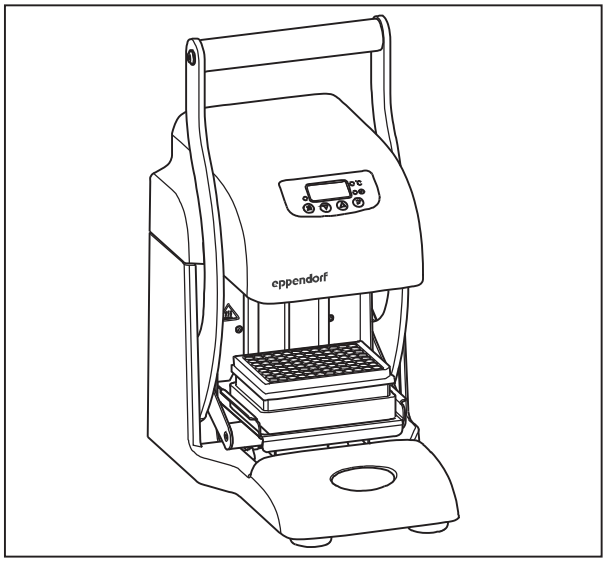

1. Switch on the device.
2. Insert adapter.
3. Set the temperature and sealing duration.
4. Press the *heater* key.
   The *heater* LED flashes and the heating plate heats up. It takes approx. 10 minutes to heat up.
   When it has reached the set temperature the *heater* LED illuminates constantly.
   The device is ready for operation.
5. Put the plate on the adapter.

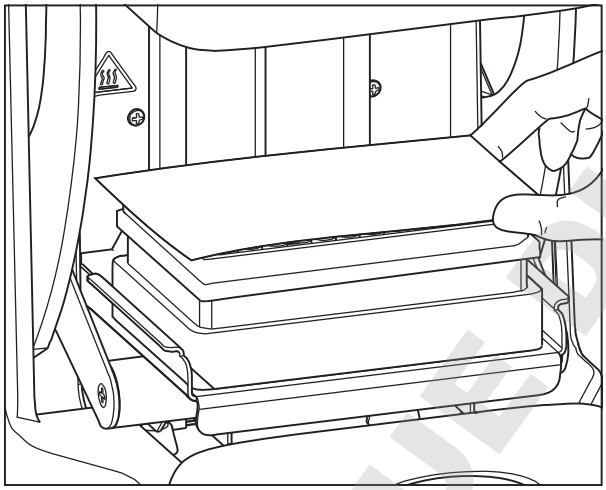

6. Position the foil on the plate. The foil must be laid with the sealing or adhesive side down on the plate.

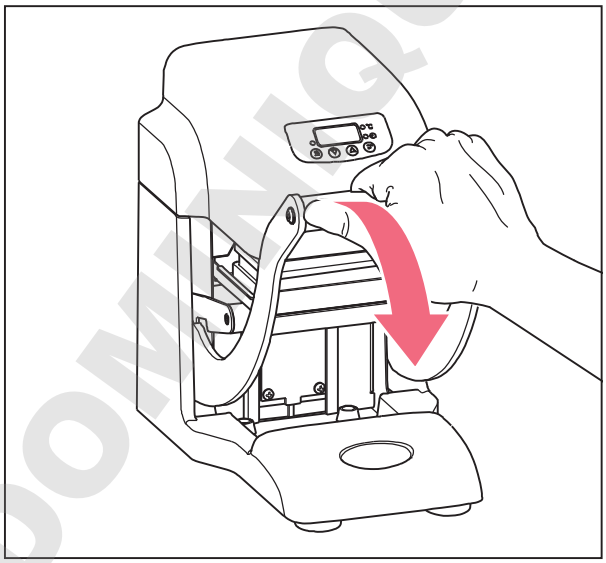

7. Press the handle down until the heating plate makes contact with the foil. Do not apply more force than is necessary.
   The device automatically detects when the heating plate has reached the correct position and starts the countdown for the sealing duration.
8. Hold a sufficiently strong contact between the heating plate and foil until the countdown has ended.

DOWNLOAD DUTSCHER SAS

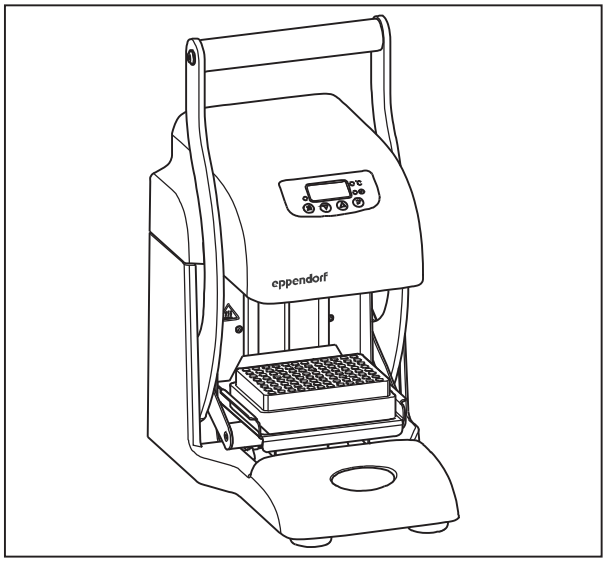

9. Shift the handle back to its starting position.
10. Let the sealed plate cool off.
11. Remove the plate.
12. If no other plates are to be sealed: Switch off the device.

5.4 Switching the audible alert on/off

The audible alert sounds when the sealing duration countdown starts or ends.

1. Switch on the device.
2. Press the *mode* key until the *temperature* LED illuminates.
3. Press the *heater* and *mode* keys simultaneously.
   The current setting of the audible alert is shown on the display.
   - 01: Alert switched on
   - 00: Alert switched off
4. Use the *up* and *down* keys to switch the alert on/off.
5. Press the *mode* key to save the setting.

DOMINIQUE DUTSCHER SAS

6 Troubleshooting

6.1 Thermal fuse triggered

The device is equipped with a thermal fuse. When a temperature of 235 °C is exceeded on the heating plate, the thermal fuse triggers and switches the heating plate off permanently.

▸ Send the defective device to the authorized service center.

6.2 The device cannot be switched on or does not heat up

1. Check the mains/power plug and mains/power cord.
2. Check the set mains/power supply voltage and the fuse. Replace the fuse if it is defective.
3. Switch the device off and back on.

If none of these measures could eliminate the problem:

▸ Send the defective device to the authorized service center.

DOMINIQUE DUTSCHER SAS

7 Maintenance

7.1 Cleaning

Regularly clean the housing of the device and the adapter.

DANGER! Electric shock as a result of penetration of liquid.

- Switch off the device and disconnect the power plug before starting cleaning or disinfection work.
- Do not allow any liquids to penetrate the inside of the housing.
- Do not spray clean/spray disinfect the housing.
- Only plug the device back in if it is completely dry, both inside and outside.

NOTICE! Damage from the use of aggressive chemicals.

- Do not use any aggressive chemicals on the device or its accessories, such as strong and weak bases, strong acids, acetone, formaldehyde, halogenated hydrocarbons or phenol.
- If the device has been contaminated by aggressive chemicals, immediately clean it by means of a mild cleaning agent.

NOTICE! Corrosion due to aggressive cleaning agents and disinfectants.

- Do not use corrosive cleaning agents, aggressive solvents or abrasive polishes.

NOTICE! Improper tools can cause damage.
Removing residuals on the heating plate with tools can destroy the heating plate.

- Only use a lint-free cloth to clean the device and the heating plate.

Aids

- Lint-free cloth.
- Mild soap-based laboratory cleaner.
- Distilled water.

Cleaning the device

1. Switch off the device and disconnect it from the mains/power line.
2. Allow device to cool down.
3. Clean all exterior parts of the device and the adapter plate with a mild soap solution and lint-free cloth.
4. Wipe off the soap solution with distilled water.
5. Dry all cleaned parts.

DOMINIQUE DUTSCHER SAS

7.2 Disinfection/Decontamination

DANGER! Electric shock as a result of penetration of liquid.

- Switch off the device and disconnect the power plug before starting cleaning or disinfection work.
- Do not allow any liquids to penetrate the inside of the housing.
- Do not spray clean/spray disinfect the housing.
- Only plug the device back in if it is completely dry, both inside and outside.

1. Switch off the device and disconnect it from the mains/power line.
2. Remove all cables and accessory parts from the device.
3. Clean the device with a mild cleaning agent before the disinfection.
4. Select a disinfection method that corresponds with the legal provisions and guidelines valid for your area of application.

   Use e.g. alcohol (ethanol, isopropanol) or alcoholic disinfectant.
5. Wipe the surfaces with a lint-free cloth that has been moistened with disinfectant.
6. Disinfect all parts that are to be sent in with the device.

DOMINIQUE DUTSCHER SAS

7.3 Replacing fuses

DANGER! Electric shock.

- Switch off the device and disconnect the power plug before starting maintenance or cleaning work.

NOTICE! Damage to device due to a fuse that does not match the preselected mains/power supply voltage.

- Use a fuse that matches the preselected mains/power supply voltage in accordance with the table.

The device is supplied with a fuse for 230 V.
If the device is to be converted for a mains/power supply voltage of 115 V, then the fuse must be replaced according to the table.

Setting the mains/power supply voltage on the device	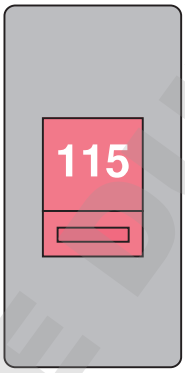	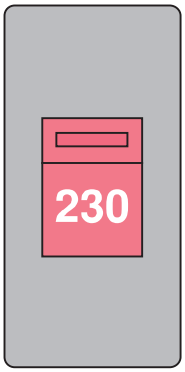
Voltage supply	110 - 120 V ±10 %	220 - 230 V ±10 %
Fuse	T3.15 AH 250 V 20x5 mm	T1.6 AH 250 V 20x5 mm

The selector switch for the mains/power supply voltage is located on the rear side of the device.

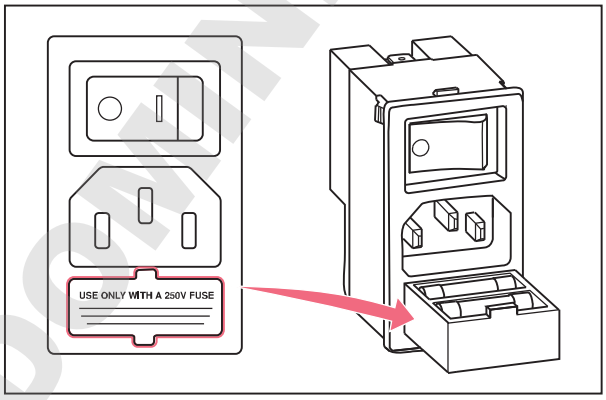

1. Switch off the device and disconnect the mains/power plug.
2. Open the fuse drawer using a suitable screwdriver and pull it right out.
3. Replace the defective fuse in the rear compartment.
4. Close the fuse drawer again.

DOMINIQUE DUTSCHER SAS

8 Technical data

Weights and dimensions	
Weight	7.2 kg
Dimensions	Width: 220 mm Depth: 325 mm Height: 425 mm

Mains/power supply	
Voltage supply	
115:	110 - 120 V ±10 % / 50 Hz to 60 Hz ± 5%
230:	220 - 230 V ±10 % / 50 Hz to 60 Hz ± 5%
Power consumption, max.	350 W
Degree of pollution	2 (IEC 664)
Protection class	I
Overvoltage category	II
Fuses	
115:	T3.15 AH 250 V 20x5 mm
230:	T1.6 AH 250 V 20x5 mm

Ambient conditions	
For indoor use only	
Ambient temperature	+18 °C to +35 °C
Relative humidity	20 % to 80 %
Atmospheric pressure	Use up to a height of 2200 m above sea level

Operating parameters	
Adjustable temperature range	125 °C - 200 °C in 1 °C increments
Tolerance range	±2 °C
Adjustable sealing duration	1.0 s - 9.0 s in 0.5 s increments

DOMINIQUE DUTSCHER SAS

9 Transport, storage and disposal

9.1 Decontamination before shipment

If you are shipping the device to the authorized Technical Service for repairs or to your authorized dealer for disposal please note the following:

WARNING! Risk to health from contaminated device

1. Follow the instructions in the decontamination certificate. You find it as a PDF file on our website (www.eppendorf.com/decontamination).
2. Decontaminate all the parts you would like to dispatch.
3. Include the fully completed decontamination certificate in the packing.

9.2 Transport

- Use the original packing for transport.
- Use the transport securing devices.

	Air temperature	Relative humidity	Atmospheric pressure
General transport	-10 °C – +50 °C	20 % – 95 %	300 hPa – 1060 hPa
Air freight	-10 °C – +50 °C	20 % – 95 %	300 hPa – 1060 hPa

9.3 Storage

	Air temperature	Relative humidity	Atmospheric pressure
In transport packing	-10 °C – +50 °C	20 % – 95 %	700 hPa – 1060 hPa
Without transport packing	-10 °C – +50 °C	20 % – 95 %	700 hPa – 1060 hPa

DOMINIQUE DUTSCHER SAS

9.4 Disposal

In case the product is to be disposed of, the relevant legal regulations are to be observed.

Information on the disposal of electrical and electronic devices in the European Community:

Within the European Community, the disposal of electrical devices is regulated by national regulations based on EU Directive 2012/19/EU pertaining to waste electrical and electronic equipment (WEEE).

According to these regulations, any devices supplied after August 13, 2005, in the business-to-business sphere, to which this product is assigned, may no longer be disposed of in municipal or domestic waste. To document this, they have been marked with the following identification:



Because disposal regulations may differ from one country to another within the EU, please contact your supplier if necessary.

DOMINIQUE DUTSCHER SAS

10 Ordering information

Order no. (International)	Order no. (North America)	Description
		HeatSealer 110 V – 230 V/50 Hz– 60 Hz
5391 000.001	5391000001	S100
5392 000.005	5392000005	S200
5392 070.020	5392070020	**Plate Adapter, low profile, for HeatSealer S200**
5392 070.038	5392070038	**96-well PCR Plate Adapter, for HeatSealer S200**
5392 070.011	5392070011	**Plate Adapter, high profile, for HeatSealer S200**
0030 127.838	0030127838	**Heat Sealing Film** 100 pieces
0030 127.854	0030127854	**Heat Sealing Foil** 100 pieces

DOMINIQUE DUTSCHER SAS

eppendorf

Declaration of Conformity

The product named below fulfills the requirements of directives and standards listed. In the case of unauthorized modifications to the product or an unintended use this declaration becomes invalid.

Product name:

HeatSealer S200

Product type:

Heatsealer

Relevant directives / standards:

2014/35/EU: IEC 61010-1, EN 61010-2-010

2014/30/EU: EN 61326-1

2011/65/EU: EN 50581

UL 61010-1, CAN/CSA C22.2 No. 61010-1

FCC CFR 47 Parts 15.107 and 15.109, Class B

Date: April 18, 2016

Management Board

Portfolio Management

Your local distributor: www.eppendorf.com/contact
Eppendorf AG · 22331 Hamburg · Germany
eppendorf@eppendorf.com

Eppendorf® and the Eppendorf logo are registered trademarks of Eppendorf AG, Germany.
U.S. Design Patents are listed on www.eppendorf.com/ip.
All rights reserved, incl. graphics and pictures. Copyright 2015 © by Eppendorf AG.

www.eppendorf.com

ISO 9001 Certified

ISO 13485 Certified

ISO 14001 Certified

5392 900.405-01

DOMINIQUE DUTSCHER SAS

DOMINIQUE DUTSCHER SAS

DOMINIQUE DUTSCHER SAS

Evaluate Your Manual

Give us your feedback.
www.eppendorf.com/manualfeedback

DOMINIQUE DUTSCHER SAS

Your local distributor: www.eppendorf.com/contact
Eppendorf AG · 22331 Hamburg · Germany
eppendorf@eppendorf.com · www.eppendorf.com